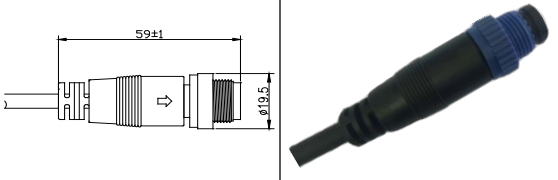
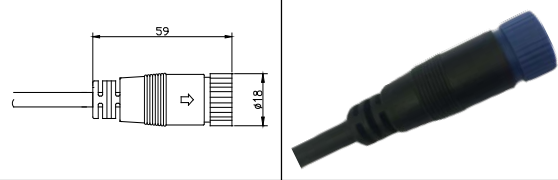


M15 Series


M15 Male Molding Type Straight

		
Item Number	Current Rating	Pin Configuration
BWM15-02M-MXXS180	5A	
BWM15-03M-MXXS180	5A	
BWM15-04M-MXXS180	5A	
Product Specification		Description
Temperature Range	-20°C ~ 85°C	
Connector Body	Nylon + GF, or TPU	
Contact Resistance	≤ 10 mΩ	
Insulation Resistance	≥ 100 MΩ at 500V DC	
Breakdown Voltage	≥500V / 1 Minute (≤5 A)	
Contact	Gold plated Brass	
Screw Nut	Nickel plated Brass	
Waterproof Rate	IP66, IP67, IP68	

M15 Female Molding Type Straight

		
Item Number	Current Rating	Pin Configuration
BWM15-02AFFM-SS6	10A	
BWM15-03AFFM-SS6	10A	
BWM15-04AFFM-SS6	10A	
Product Specification		Description
Temperature Range	-20°C ~ 85°C	
Connector Body	Nylon + GF, or TPU	
Contact Resistance	≤ 10 mΩ	
Insulation Resistance	≥ 100 MΩ at 500V DC	
Breakdown Voltage	≥500V / 1 Minute (≤5 A)	
Contact	Gold plated Brass	
Screw Nut	Nickel plated Brass	
Waterproof Rate	IP66, IP67, IP68	

M15 1 TO SR Type Straight

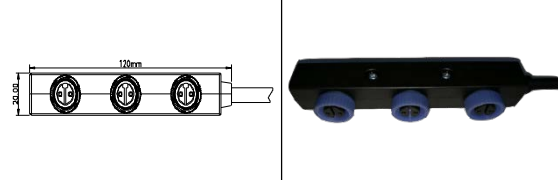		
Item Number	Current Rating	Pin Configuration
BWM15-02SR-MXXS180	10A	
BWM15-03SR-MXXS180	10A	
BWM15-04SR-MXXS180	10A	
BWM15-05SR-MXXS180	10A	
Product Specification		Description
Temperature Range	-20°C ~ 85°C	
Connector Body	Nylon + GF, or TPU	
Contact Resistance	≤ 10 mΩ	
Insulation Resistance	≥ 100 MΩ at 500V DC	
Breakdown Voltage	≥500V / 1 Minute (≤5 A)	
Contact	Gold plated Brass	
Screw Nut	Nickel plated Brass	
Waterproof Rate	IP66, IP67, IP68	