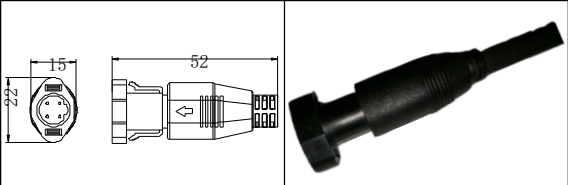
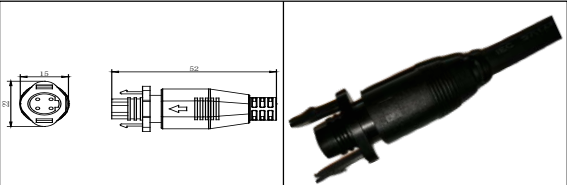


QM Size MM Molding Type Straight

		
Item Number	Current Rating	Pin Configuration
BWQ10-02AMMM-LQ	10A	
BWQ10-03AMMM-LQ	10A	
BWQ10-04AMMM-LQ	10A	
BWQ5-04~06AMMM-LQ	5A	
Product Specification		Description
Temperature Range	-20°C ~ 85°C	
Connector Body	PPO	
Contact Resistance	≤ 10 mΩ	
Insulation Resistance	≥ 100 MΩ at 500V DC	
Breakdown Voltage	≥500V / 1 Minute (≤5 A)	
Contact	Gold plated Brass	
Screw Nut	Nickel plated Brass	
Waterproof Rate	IP66, IP67, IP68	

QM Size FF Molding Type Straight

		
Item Number	Current Rating	Pin Configuration
BWQ10-02AFFM-LS	10A	
BWQ10-03AFFM-LS	10A	
BWQ10-04AFFM-LS	10A	
BWQ5-04~06AFFM-LS	5A	
Product Specification		Description
Temperature Range	-20°C ~ 85°C	
Connector Body	PPO	
Contact Resistance	≤ 10 mΩ	
Insulation Resistance	≥ 100 MΩ at 500V DC	
Breakdown Voltage	≥500V / 1 Minute (≤5 A)	
Contact	Gold plated Brass	
Screw Nut	Nickel plated Brass	
Waterproof Rate	IP66, IP67, IP68	